


REV	DESCRIPTION	DATE
1.0		

DOTS DETAIL

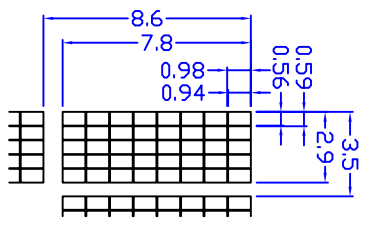


SCALE=2.5:1


PIN ASSIGNMENT

1	GND
2	VDD
3	V0
4	RS
5	RV
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K


Contact side detail

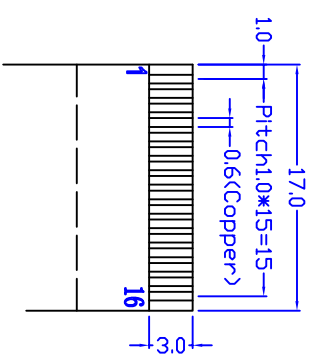

SCALE=1.5:1

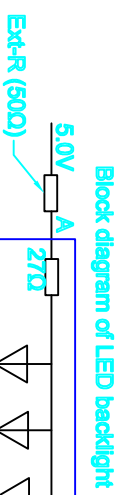


Block diagram of LED backlight

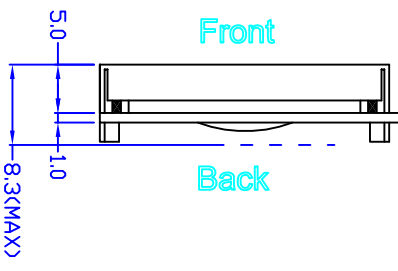

Front
Back

CONTACT SIDE
STIFFENER

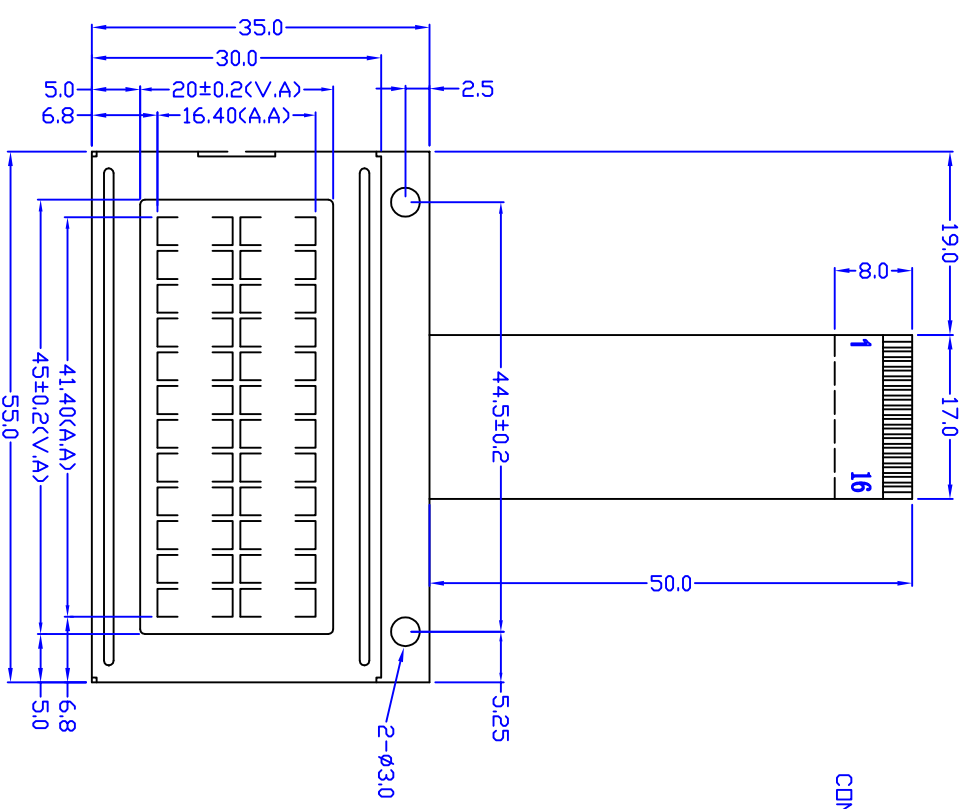

VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Y-G/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Driver : S6A0069 or ST7066
- 6). Backlight:Y-G/Side backlight/5.0V

Model Name:	OCU1202A	Ocular Enterprises	
GENERAL TOL:	± 0.3	SCALE:	1:1
APPROVALS	DATE	DRAWN NO.	SIZE: A4
DWN:		UNT:	mm
CHK:		Page:	1-1
APP:			